

COPY FREE AREA

**Danger. Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness and dizziness. May cause damage to organs through prolonged or repeated exposure.**  
**Prevention:** Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Pressurized container. Do not pierce or burn, even after use. Do not breathe dust or mist. Wash hands thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves. Wear eye or face protection. **Response: IF ON SKIN:** Wash with plenty of soap and water. Take off contaminated clothing. Wash contaminated clothing before reuse. **IF INHALED:** Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a **POISON CENTER** or physician if you feel unwell. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if you feel unwell. **IF SKIN IRRITATION OCCURS:** Get medical attention. **IF EYE IRRITATION PERSISTS:** Get medical attention. **Storage:** Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. **Disposal:** Dispose of contents and container in accordance with all local, regional, national and international regulations. **DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.** Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. **FOR INDUSTRIAL USE ONLY.** Please refer to the SDS for additional information. Keep upright in a cool, dry place. Do not discard empty can in trash compactor. Emergency telephone number (216) 566-2917. Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 2.5%.

**KEEP OUT OF THE REACH OF CHILDREN**  
**Peligro. Aerosol extremadamente inflamable. Contiene gas a presión; puede explotar si se calienta. Provoca irritación cutánea. Provoca irritación ocular grave. Puede irritar las vías respiratorias. Puede provocar somnolencia o vértigo. Puede provocar daños en los órganos tras exposiciones prolongadas o repetidas.**  
**Prevenición:** Mantener alejado del calor, superficies calientes, chispas, llamas abiertas y otras fuentes de ignición. No fumar. No vaporizar sobre una llama al descubierto o cualquier otra fuente de ignición. Recipiente a presión. No perforar ni quemar, incluso después de su uso. No respirar polvos o nieblas. Lavarse cuidadosamente las manos después de la manipulación. Utilizar sólo al aire libre o en un lugar bien ventilado. Usar cuantos de protección. Usar protección para los ojos o la cara. **Intervención: EN CASO DE CONTACTO CON LA PIEL:** Lavarse con abundante agua y jabón. Quitar la ropa contaminada. Lavar la ropa contaminada antes de volverla a usar. **EN CASO DE INHALACIÓN:** Transportar a la víctima al aire libre y mantenerla en reposo en una posición que le facilite la respiración. Llamar a un **CENTRO DE CONTROL DE ENVENENAMIENTO** o a un médico si la persona se siente mal. **EN CASO DE CONTACTO CON LOS OJOS:** Enjuagar con agua cuidadosamente durante varios minutos. Quitar las lentes de contacto, cuando estén presentes y pueda hacerse con facilidad. Proseguir con el lavado. Buscar atención médica si la persona se siente mal. En caso de irritación cutánea: Buscar atención médica. Si la irritación ocular persiste: Buscar atención médica. **Almacenamiento:** Almacenar en un lugar bien ventilado. Guardar bajo llave. Proteger de la luz solar. No exponer a una temperatura superior a 50 °C/122 °F. **Eliminación:** Eliminar el contenido y recipiente conforme a todas las reglamentaciones locales, regionales, nacionales e internacionales. **EFFECTOS POSTERIORES DEBIDO AL CONTACTO POR MUCHO TIEMPO.** Contiene solventes que pueden causar daños permanentes al cerebro y al sistema nervioso. El uso erróneo deliberadamente concentrando e inhalando el contenido puede ser peligroso y hasta fatal. **PARA USO INDUSTRIAL.** Por favor refiérase a las FDS para obtener información adicional. Manténgalo en posición vertical en un lugar fresco y seco. No tire las latas vacías en los compactadores de basura. Teléfono de emergencia (216) 566-2917. Porcentaje de la mezcla consistente de ingrediente(s) de toxicidad desconocida: 2.5%.

**MANTÉNGA FUERA DEL ALCANCE DE LOS NIÑOS**

preserve. protect. prevent.™



# HEAVY DUTY EQUIPMENT & SURFACE DEICER

## Descongelador de Equipos de Servicio Pesado y Superficies

# SP™ 704

MIN TEMP  
-80°F  
-62°C

pH  
8.0-10.0

ASPHALT & ROSIN FREE

SPRAY UP TO 20FT.

H 3  
F 2  
R 0

**SP™704 HEAVY DUTY EQUIPMENT & SURFACE DEICER**  
 SP™704 Heavy Duty Equipment & Surface Deicer melts ice, snow, and frost on contact. Harmless to car and fleet finish. Thaws frozen locks and is effective in sub-zero temperatures. Unique solvent system and spray delivery ensures the job gets done fast and when you need it the most. SP™ 704 Heavy Duty Equipment & Surface Deicer can spray up to 20 ft for those difficult to reach deicing applications and will not smear.  
**TYPICAL USES:**  
 Thaws ice on equipment, auto & fleet windshields, head & tail lights, locking mechanisms, doors, icy steps, small surface areas such as walk-ways and much more.  
 Refer to product data sheet for application instructions.

**SP™704 DESCONGELADOR DE EQUIPOS DE SERVICIO PESADO Y SUPERFICIES**  
 SP™704 Descongelador de Equipos de Servicio Pesado y Superficies derrite hielo, nieve y escarcha por contacto. Es inofensivo para el acabado de automóviles y flotas. Descongela cerraduras congeladas y es efectivo a temperaturas muy bajas. Sistema de disolvente exclusivo y suministro de rociado que asegura que el trabajo se haga de forma rápida y cuando más lo necesite. SP™704 Descongelador de Equipos de Servicio Pesado y Superficies puede rociar a distancias de hasta 20 pies en esas aplicaciones de descongelación difíciles de alcanzar y no manchará.  
**USOS TÍPICOS:**  
 Descongela hielo de equipos, parabrisas de automóviles y flotas, faros y luces de cola, mecanismos de traba, puertas, escalones helados, pequeñas superficies como pasarelas y mucho más.  
 Consulte las instrucciones de aplicación en la hoja de datos del producto.

**CONTAINS (CAS#):** Methanol (67-56-1), Water (7732-18-5), Ethylene Glycol (107-21-1), Carbon Dioxide (124-38-9)

ORDER No. S00704000



0 75577 00581 9

Before using, carefully read CAUTIONS on back panel  
 Antes de usarlo, lea cuidadosamente las PRECAUCIONES en la parte posterior de la etiqueta.

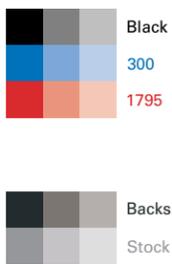
15 OZ • 425g

COPY FREE AREA

Note: It is ok to bleed backgrounds to the glue flap. There will not be any issues with adhesive not sticking because of ink.

5" GLUE FLAP • .125 COPY FREE AREA • .625 COPY FREE AREA

LMS00704000A

<p>Item#: 1011783</p> <p>C P N: LMS00704000A</p> <p>Customer: Sherwin Williams</p> <p>Plate #: 64084F</p> <p>Cust Item: 64084 MET Sprayon X SP704</p> <p>Master Est #: M000003708</p> <p>Document Size: 8.625 x 7.449</p>	 <p>Black</p> <p>300</p> <p>1795</p> <p>Backside Eyemark</p> <p>Stock Sim</p>	<p><b>PLEASE NOTE:</b>                  Please read and check closely all information on the proof: color, color breaks, spelling, missing text. This information is extremely important. The job will not be sent to print until final OK is received. All information contained in the label and info box are the responsibility of the final approver.</p>	<p><b>PRINTING FLEXOGRAPHIC</b></p> <p><b>CUSTOMER SIGN OFF:</b></p> <p><input type="checkbox"/> APPROVED</p> <p><input type="checkbox"/> NOT APPROVED</p> <p><b>INITIAL &amp; DATE:</b></p> <p><b>ARTIST INITIAL &amp; DATE:</b></p> <p><b>QC INITIAL &amp; DATE:</b></p>
<p><b>JOB HISTORY</b> (Note: Revisions will be listed here as they occur.)</p> <p>5.8.15 (ds) Art Setup "F".</p>			



CL&D Graphics Inc.  
 1101 W. 2nd St.  
 Oconomowoc, WI 53066

Ph. (262) 569-4660  
 Fax (262) 569-4975  
[www.cidgraphics.com](http://www.cidgraphics.com)

CL&D TECHNICAL SPECIFICATIONS • ROLLED FILM LEGEND			
<p><b>ROLLED FILM TEMPLATE</b></p> <p>CUSTOMER: Sherwin Williams</p> <p>SIZE: 8.625 x 7.449</p> <p>ME: 3707, 3708</p> <p>PSS Completed: (date/initials)</p> <p>Revisions: 10.24.13 DJK update to new legend</p> <p>4.22.15 (PR) changed pss7833 pss8091 to ME3707 ME3708</p>	<p><b>CONSTRUCTION</b></p> <ul style="list-style-type: none"> <li> Seal/Seam Area</li> <li> Dieline</li> <li> Fold Line</li> <li> Perforation</li> <li> Zipper</li> </ul>	<p><b>GRAPHIC PLACEMENT</b></p> <ul style="list-style-type: none"> <li> Print Area</li> <li> Printed Area</li> <li> NO COPY, LIMITED GRAPHICS</li> <li> Non Printed Area</li> <li> NO INK OR COATING</li> <li> Graphics Bleed</li> </ul>	<p><b>3D / DISTORTION</b></p> <ul style="list-style-type: none"> <li> NO Distortion Area</li> <li> HIGH Distortion Area</li> </ul>
<p><b>DISCLAIMER/TOLERANCE SPECIFICATIONS:</b></p> <ol style="list-style-type: none"> <li>1.) Glue flap area will be covered by opposing side of label during application</li> <li>2.) Final outside packaging dimension may vary +/- &lt; .0625"</li> <li>3.) Eyemark position subject to change pending label application equipment</li> </ol> <p>*Colors of the mechanicals within the template may be modified for legibility purposes. Assignment of purpose to these mechanicals has not been altered.</p>			

Final Unwind 3

COPY FREE AREA

preserve. protect. prevent.™



**HEAVY DUTY EQUIPMENT & SURFACE DEICER**

**Descongelador de Equipos de Servicio Pesado y Superficies**

**SP™704**

MIN TEMP  
-89°F  
-62°C

pH  
8.0-10.0

ASPHALT & ROSIN FREE

SPRAY UP TO  
20FT

H 3  
F 2  
R 0

**Danger. Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness and dizziness. May cause damage to organs through prolonged or repeated exposure.**

**Prevention:** Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Pressurized container. Do not pierce or burn, even after use. Do not breathe dust or mist. Wash hands thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves. Wear eye or face protection. **Response: IF ON SKIN:** Wash with plenty of soap and water. Take off contaminated clothing. Wash contaminated clothing before reuse. **IF INHALED:** Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a **POISON CENTER** or physician if you feel unwell. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if you feel unwell. **Storage:** Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. **Disposal:** Dispose of contents and container in accordance with all local, regional, national and international regulations. **DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.** Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. **FOR INDUSTRIAL USE ONLY.** Please refer to the SDS for additional information. Keep upright in a cool, dry place. Do not discard empty can in trash compactor. Emergency telephone number (216) 566-2917. Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 2.5%.

**KEEP OUT OF THE REACH OF CHILDREN**

**Peligro. Aerosol extremadamente inflamable. Contiene gas a presión; puede explotar si se calienta. Provoca irritación cutánea. Provoca irritación ocular grave. Puede irritar las vías respiratorias. Puede provocar somnolencia o vértigo. Puede provocar daños en los órganos tras exposiciones prolongadas o repetidas.**

**Prevenición:** Mantener alejado del calor, superficies calientes, chispas, llamas abiertas y otras fuentes de ignición. No fumar. No vaporizar sobre una llama al descubierto o cualquier otra fuente de ignición. Recipiente a presión. No perforar ni quemar, incluso después de su uso. No respirar polvos o nieblas. Lavarse cuidadosamente las manos después de la manipulación. Utilizar sólo al aire libre o en un lugar bien ventilado. Usar cuantes de protección. Usar protección para los ojos o la cara. **Intervención: EN CASO DE CONTACTO CON LA PIEL:** Lavar con abundante agua y jabón. Quitar la ropa contaminada. Lavar la ropa contaminada antes de volverla a usar. **EN CASO DE INHALACIÓN:** Transportar la víctima al aire libre y mantenerla en reposo en una posición que le facilite la respiración. Llamar a un **CENTRO DE CONTROL DE ENVENENAMIENTO** o a un médico si la persona se siente mal. **EN CASO DE CONTACTO CON LOS OJOS:** Enjuagar con agua cuidadosamente durante varios minutos. Quitar las lentes de contacto, cuando estén presentes y pueda hacerse con facilidad. Proseguir con el lavado. Buscar atención médica si la persona se siente mal. En caso de irritación cutánea: Buscar atención médica. Si la irritación ocular persiste: Buscar atención médica. **Almacenamiento:** Almacenar en un lugar bien ventilado. Guardar bajo llave. Proteger de la luz solar. No exponer a una temperatura superior a 50 °C/122 °F. **Eliminación:** Eliminar el contenido y recipiente conforme a todas las reglamentaciones locales, regionales, nacionales e internacionales. **EFFECTOS POSTERIORES DEBIDO AL CONTACTO POR MUCHO TIEMPO.** Contiene solventes que pueden causar daños permanentes al cerebro y al sistema nervioso. El uso erróneo deliberadamente concentrando e inhalando el contenido puede ser peligroso y hasta fatal. **PARA USO INDUSTRIAL.** Por favor refiérase a las FDS para obtener información adicional. Manténgalo en posición vertical en un lugar fresco y seco. No tire las latas vacías en los compactadores de basura. Teléfono de emergencia (216) 566-2917. Porcentaje de la mezcla consistente de ingrediente(s) de toxicidad desconocida: 2.5%.

**MANTÉNGA FUERA DEL ALCANCE DE LOS NIÑOS**

**SP™704 HEAVY DUTY EQUIPMENT & SURFACE DEICER**

SP™704 Heavy Duty Equipment & Surface Deicer melts ice, snow, and frost on contact. Harmless to car and fleet finish. Thaws frozen locks and is effective in sub-zero temperatures. Unique solvent system and spray delivery ensures the job gets done fast and when you need it the most. SP™704 Heavy Duty Equipment & Surface Deicer can spray up to 20 ft for those difficult to reach deicing applications and will not smear.

**TYPICAL USES:**  
Thaws ice on equipment, auto & fleet windshields, head & tail lights, locking mechanisms, doors, icy steps, small surface areas such as walk-ways and much more.  
Refer to product data sheet for application instructions.

**SP™704 DESCONGELADOR DE EQUIPOS DE SERVICIO PESADO Y SUPERFICIES**

SP™704 Descongelador de Equipos de Servicio Pesado y Superficies derrite hielo, nieve y escarcha por contacto. Es inofensivo para el acabado de automóviles y flotas. Descongela cerraduras congeladas y es efectivo a temperaturas muy bajas. Sistema de disolvente exclusivo y suministro de rociado que asegura que el trabajo se haga de forma rápida y cuando más lo necesite. SP™704 Descongelador de Equipos de Servicio Pesado y Superficies puede rociar a distancias de hasta 20 pies en esas aplicaciones de descongelación difíciles de alcanzar y no manchará.

**USOS TÍPICOS:**  
Descongela hielo de equipos, parabrisas de automóviles y flotas, faros y luces de cola, mecanismos de traba, puertas, escalones helados, pequeñas superficies como pasarelas y mucho más.  
Consulte las instrucciones de aplicación en la hoja de datos del producto.

**CONTAINS (CAS#):** Methanol (67-56-1), Water (7732-18-5), Ethylene Glycol (107-21-1), Carbon Dioxide (124-38-9)

ORDER No. S00704000



0 75577 00581 9

Before using, carefully read CAUTIONS on back panel  
Antes de usarlo, lea cuidadosamente las PRECAUCIONES en la parte posterior de la etiqueta.

15 OZ • 425g



SPRAYON™  
MOBILE SOURCE  
Sprayon.com  
800-SPRAYON  
(800-774-9666)

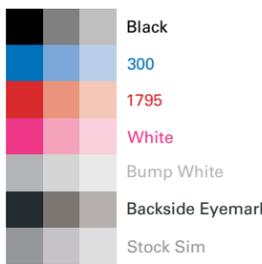
Scan QR code to download product data sheet and view safety information. © 2015 Sherwin-Williams. Made in the U.S.A. with Imported Materials. 100011214 Car. Mexican Spanish.

COPY FREE AREA

8.625" Around

Note: It is ok to bleed backgrounds to the glue flap. There will not be any issues with adhesive not sticking because of ink.

LMS00704000A

<p>Item#: 1011783</p> <p>C P N: LMS00704000A</p> <p>Customer: Sherwin Williams</p> <p>Plate #: 64084F</p> <p>Cust Item: 64084 MET Sprayon X SP704</p> <p>Master Est #: M000003708</p> <p>Document Size: 8.625 x 7.449</p>		<p><b>PLEASE NOTE:</b> Please read and check closely all information on the proof: color, color breaks, spelling, missing text. This information is extremely important. The job will not be sent to print until final OK is received. All information contained in the label and info box are the responsibility of the final approver.</p>	<p><b>PRINTING FLEXOGRAPHIC</b></p> <p><b>CUSTOMER SIGN OFF:</b></p> <p><input type="checkbox"/> APPROVED</p> <p><input type="checkbox"/> NOT APPROVED</p> <p><b>INITIAL &amp; DATE:</b></p> <p><b>ARTIST INITIAL &amp; DATE:</b></p> <p><b>QC INITIAL &amp; DATE:</b></p>
<p><b>JOB HISTORY</b> (Note: Revisions will be listed here as they occur.)</p> <p>5.8.15 (ds) Art Setup "F".</p>			


**CL&D Graphics Inc.**  
 1101 W. 2nd St.  
 Oconomowoc, WI 53066  
 Ph. (262) 569-4660  
 Fax (262) 569-4975  
[www.cidgraphics.com](http://www.cidgraphics.com)

CL&D TECHNICAL SPECIFICATIONS • ROLLED FILM LEGEND			
<p><b>ROLLED FILM TEMPLATE</b></p> <p>CUSTOMER: Sherwin Williams</p> <p>SIZE: 8.625 x 7.449</p> <p>ME: 3707, 3708</p> <p>PSS Completed: (date/initials)</p> <p>Revisions: 10.24.13 DJK update to new legend</p> <p>4.22.15 (PR) changed pss7833 pss8091 to ME3707 ME3708</p>	<p><b>CONSTRUCTION</b></p> <ul style="list-style-type: none"> <li> Seal/Seam Area</li> <li> Dieline</li> <li> Fold Line</li> <li> Perforation</li> <li> Zipper</li> </ul>	<p><b>GRAPHIC PLACEMENT</b></p> <ul style="list-style-type: none"> <li> Print Area</li> <li> Printed Area NO COPY, LIMITED GRAPHICS</li> <li> Non Printed Area NO INK OR COATING</li> <li> Graphics Bleed</li> </ul>	<p><b>3D / DISTORTION</b></p> <ul style="list-style-type: none"> <li> NO Distortion Area</li> <li> HIGH Distortion Area</li> </ul>
<p><b>DISCLAIMER/TOLERANCE SPECIFICATIONS:</b></p> <p>1.) Glue flap area will be covered by opposing side of label during application</p> <p>2.) Final outside packaging dimension may vary +/- &lt; .0625"</p> <p>3.) Eyemark position subject to change pending label application equipment</p> <p>*Colors of the mechanicals within the template may be modified for legibility purposes. Assignment of purpose to these mechanicals has not been altered.</p>			

preserve. protect. prevent.



# HEAVY DUTY EQUIPMENT & SURFACE DEICER

## SP 704



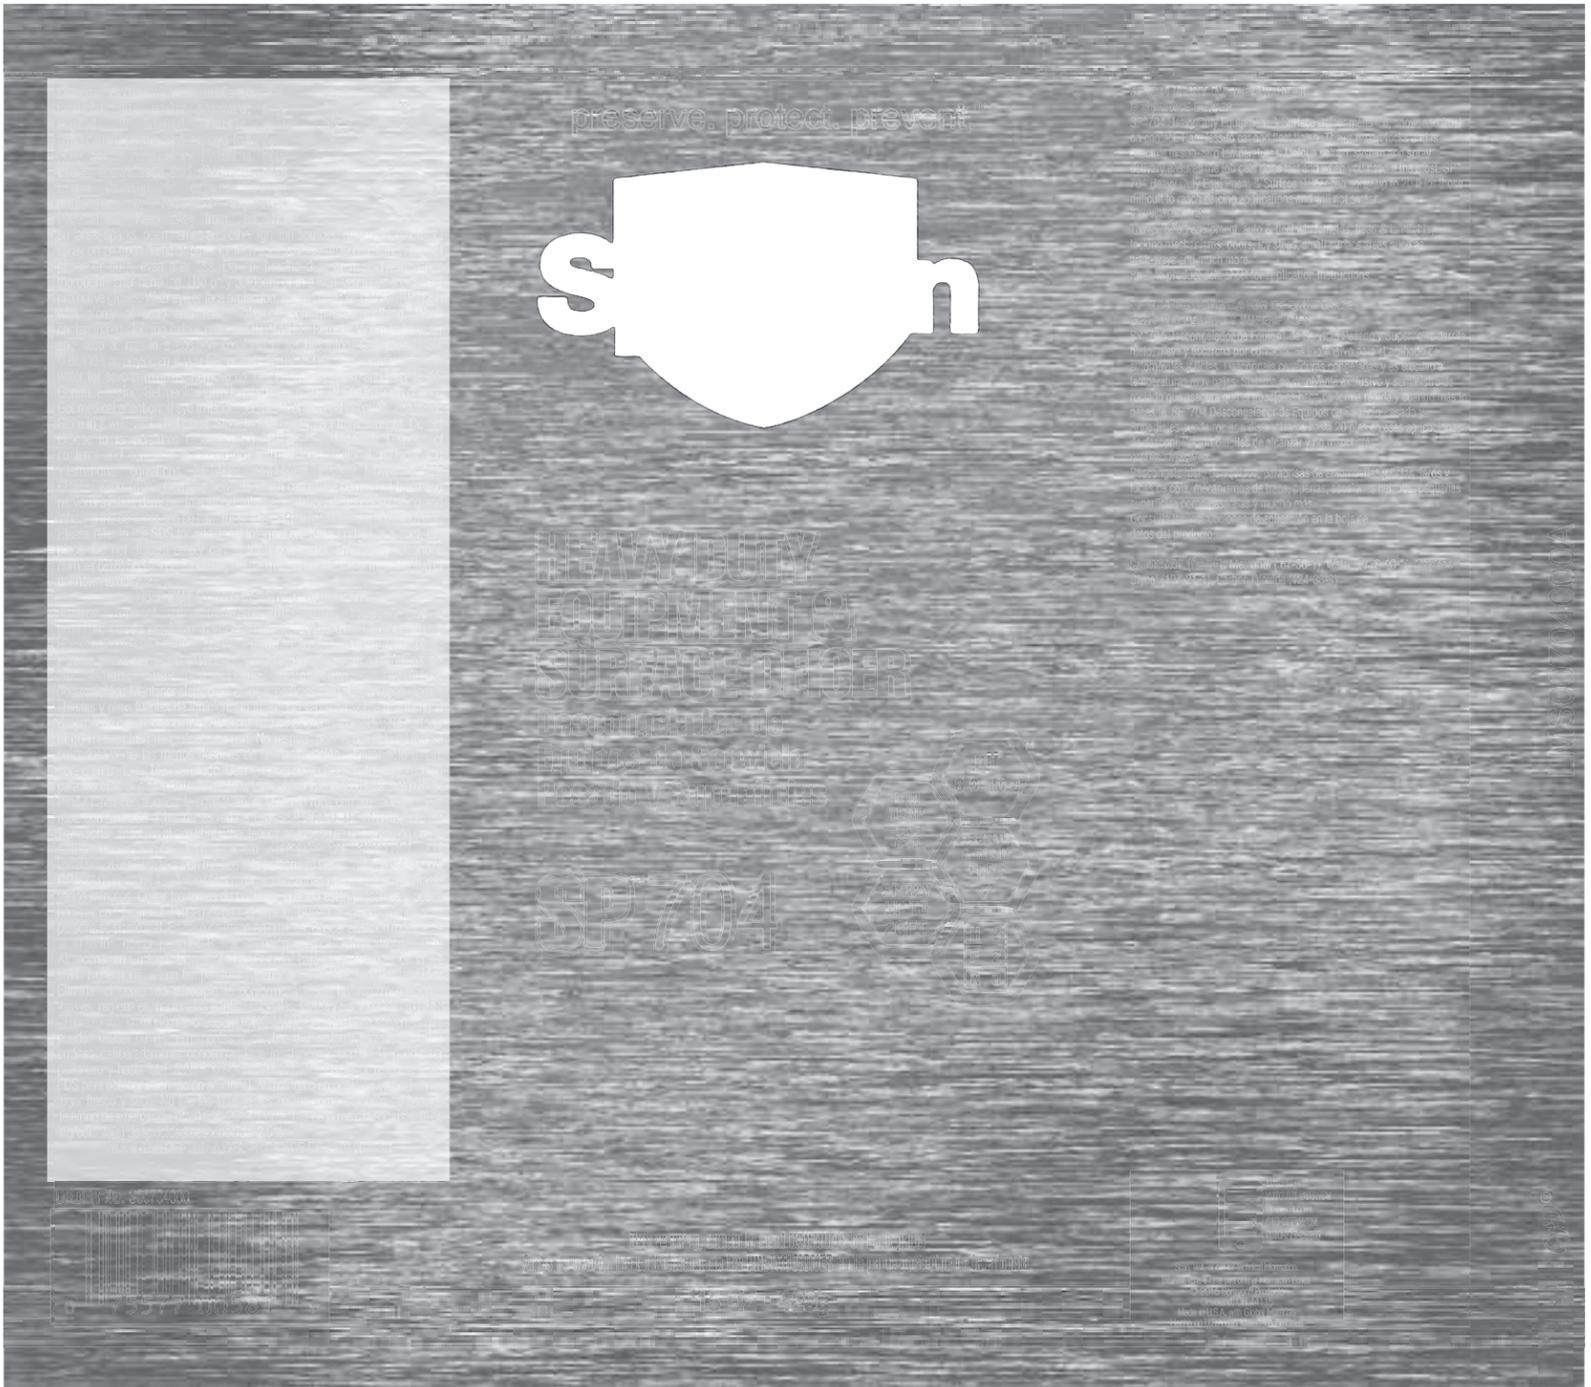
15 OZ • 425g

www.us.sherwinwilliams.com

<p>Item#: 1011783</p> <p>C P N: LMS00704000A</p> <p>Customer: Sherwin Williams</p> <p>Plate #: 64084F</p> <p>Cust Item: 64084 MET Sprayon X SP704</p> <p>Master Est #: M000003708</p> <p>Document Size: 8.625 x 7.449</p>	<p>White</p>	<p><b>PLEASE NOTE:</b> Please read and check closely all information on the proof: color, color breaks, spelling, missing text. This information is extremely important. The job will not be sent to print until final OK is received. All information contained in the label and info box are the responsibility of the final approver.</p>	<p><b>PRINTING FLEXOGRAPHIC</b></p> <p><b>CUSTOMER SIGN OFF:</b></p> <p><input type="checkbox"/> APPROVED</p> <p><input type="checkbox"/> NOT APPROVED</p> <p><b>INITIAL &amp; DATE:</b></p> <hr/> <p><b>ARTIST INITIAL &amp; DATE:</b></p> <hr/> <p><b>QC INITIAL &amp; DATE:</b></p> <hr/>
<p><b>JOB HISTORY</b> (Note: Revisions will be listed here as they occur.)</p> <p>5.8.15 (ds) Art Setup "F".</p>			

### CL&D TECHNICAL SPECIFICATIONS • ROLLFED FILM LEGEND

<p><b>ROLLFED FILM TEMPLATE</b></p> <p>CUSTOMER: Sherwin Williams</p> <p>SIZE: 8.625 x 7.449</p> <p>ME: 3707, 3708</p> <p>PSS Completed: (date/initials)</p> <p>Revisions: 10.24.13 DJK update to new legend</p> <p>4.22.15 (PR) changed pss7833 pss8091 to ME3707 ME3708</p>			
<p><b>DISCLAIMER/TOLERANCE SPECIFICATIONS:</b></p> <p>1.) Glue flap area will be covered by opposing side of label during application</p> <p>2.) Final outside packaging dimension may vary +/- &lt; .0625"</p> <p>3.) Eyemark position subject to change pending label application equipment</p> <p>*Colors of the mechanicals within the template may be modified for legibility purposes. Assignment of purpose to these mechanicals has not been altered.</p>			



Item#: 1011783

C P N: LMS00704000A

Customer: Sherwin Williams

Plate #: 64084F

Cust Item: 64084 MET Sprayon X SP704

Master Est #: M000003708

Document Size: 8.625 x 7.449



**PLEASE NOTE:**  
Please read and check closely all information on the proof: color, color breaks, spelling, missing text. This information is extremely important. The job will not be sent to print until final OK is received. All information contained in the label and info box are the responsibility of the final approver.

**PRINTING FLEXOGRAPHIC**

**CUSTOMER SIGN OFF:**

APPROVED

NOT APPROVED

**INITIAL & DATE:**

**ARTIST INITIAL & DATE:**

**QC INITIAL & DATE:**

JOB HISTORY	
(Note: Revisions will be listed here as they occur.)	
5.8.15 (ds) Art Setup "F".	

CL&D TECHNICAL SPECIFICATIONS - ROLLFED FILM LEGEND			
<b>ROLLFED FILM TEMPLATE</b> CUSTOMER: Sherwin Williams SIZE: 8.625 x 7.449 ME: 3707, 3708  PSS Completed: (date/initials) Revisions: 10.24.13 DJK update to new legend 4.22.15 (PR) changed pss7833 pss8091 to ME3707 ME3708			
<b>DISCLAIMER/TOLERANCE SPECIFICATIONS:</b> 1.) Glue flap area will be covered by opposing side of label during application 2.) Final outside packaging dimension may vary +/- < .0625" 3.) Eyemark position subject to change pending label application equipment *Colors of the mechanicals within the template may be modified for legibility purposes. Assignment of purpose to these mechanicals has not been altered.			