

Final Unwind 3

COPY FREE AREA

preserve. protect. prevent.™



NON-CHLORINATED  
BRAKE & METAL  
PARTS CLEANER

Limpiador Sin Clorar  
de Frenos y Piezas de  
Metal

SP™ 707

VOC COMPLIANT™

NON CHLORIDATED

FLAMMABLE

ACCUFORCE™ TRIGGER

H 3  
F 3  
R 0

**Danger. Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. May cause drowsiness and dizziness. Suspected of damaging the unborn child. May cause damage to organs through prolonged or repeated exposure. Prevention:** Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Pressurized container. Do not pierce or burn, even after use. Do not breathe dust or mist. Wash hands thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves. Wear eye or face protection. Use personal protective equipment as required. **Response: IF ON SKIN:** Wash with plenty of soap and water. Take off contaminated clothing. Wash contaminated clothing before reuse. **IF INHALED:** Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a **POISON CENTER** or physician if you feel unwell. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical attention. Get medical attention if you feel unwell. If skin irritation occurs: Get medical attention. If eye irritation persists: Get medical attention. **Storage:** Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122 °F. **Disposal:** Dispose of contents and container in accordance with all local, regional, national and international regulations. **DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.** Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal. **WARNING:** This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. **FOR INDUSTRIAL USE ONLY.** Please refer to the SDS for additional information. Keep upright in a cool, dry place. Do not discard empty can in trash compactor. Emergency telephone number (216) 566-2917. Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 6%.

KEEP OUT OF THE REACH OF CHILDREN

**Peligro. Aerosol extremadamente inflamable. Contiene gas a presión; puede explotar si se calienta. Provoca irritación cutánea. Provoca irritación ocular grave. Puede irritar las vías respiratorias. Puede provocar somnolencia o vértigo. Susceptible de dañar al feto. Puede provocar daños en los órganos tras exposiciones prolongadas o repetidas. Prevención:** Procurarse las instrucciones antes del uso. No manipular antes de haber leído y comprendido todas las precauciones de seguridad. Mantener alejado del calor, superficies calientes, chispas, llamas abiertas y otras fuentes de ignición. No fumar. No vaporizar sobre una llama al descubierto o cualquier otra fuente de ignición. Recipiente a presión: No perforar ni quemar, incluso después de su uso. No respirar polvos o nieblas. Lavarse cuidadosamente las manos después de la manipulación. Utilizar sólo al aire libre o en un lugar bien ventilado. Usar cuarentas de protección. Usar protección para los ojos o la cara. Utilizar un equipo de protección individual, según corresponda. **Intervención: EN CASO DE CONTACTO CON LA PIEL:** Lavar con abundante agua y jabón. Quitar la ropa contaminada. Lavar la ropa contaminada antes de volverla a usar. **EN CASO DE INHALACIÓN:** Transportar la víctima al aire libre y mantenerla en reposo en una posición que le facilite la respiración. Llamar a un **CENTRO DE CONTROL DE ENVENENAMIENTO** o a un médico si la persona se siente mal. **EN CASO DE CONTACTO CON LOS OJOS:** Enjuagar con agua cuidadosamente durante varios minutos. Quitar las lentes de contacto, cuando estén presentes y pueda hacerse con facilidad. Proseguir con el lavado. **EN CASO DE exposición demostrada o supuesta:** Buscar atención médica. Buscar atención médica si la persona se siente mal. En caso de irritación cutánea: Buscar atención médica. Si la irritación ocular persiste: Buscar atención médica. **Almacenamiento:** Almacenar en un lugar bien ventilado. Guardar bajo llave. Proteger de la luz solar. No exponer a una temperatura superior a 50 °C/122 °F. **Eliminación:** Eliminar el contenido y recipiente conforme a todas las regulaciones locales, regionales, nacionales e internacionales. **EFFECTOS POSTERIORES DEBIDO AL CONTACTO POR MUCHO TIEMPO.** Contiene solventes que pueden causar daños permanentes al cerebro y al sistema nervioso. El uso erróneo deliberadamente concentrando e inhalando el contenido puede ser peligroso y hasta fatal. **CUIDADO:** Este producto contiene químicos que a conocimiento del estado de California puede causar cáncer y defectos de nacimiento u otros daños reproductivos. **PARA USO INDUSTRIAL.** Por favor refiérase a las FDS para obtener información adicional. Manténgalo en posición vertical en un lugar fresco y seco. No tire las latas vacías en los compactadores de basura. Teléfono de emergencia (216) 566-2917. Porcentaje de la mezcla consistente de ingrediente(s) de toxicidad desconocida: 6%.

MANTÉNGA FUERA DEL ALCANCE DE LOS NIÑOS

**SP™707 NON-CHLORINATED BRAKE & METAL PARTS CLEANER**  
Sprayon™ SP™707 Non-Chlorinated Brake & Metal Parts Cleaner with ACCU-FORCE™ spray will save you time with all of your brake & metal parts cleaning by working quickly. By combining an efficient cleaning solvent system with a high output spray system, you can ensure your job gets done fast. Ultra low VOC ensures compliance in all 50 states.

**TYPICAL USES**

- Use on ABS, disc, drum brake cylinders, brake drums, brake linings, brake shoes, calipers, clutch discs, disc brake pads and discs.
- Safe for use on all brake systems including springs & wedge brakes.
- Can also be used as a metal parts and tool cleaner.
- See Product Data Sheet for complete application instructions.

**SP™707 LIMPIADOR SIN CLORAR DE FRENS Y PIEZAS DE METAL**  
Sprayon™ SP™707 Limpiador Sin Clorar de Frenos y Piezas de Metal con rociador ACCU-FORCE™ le ahorrará tiempo al limpiar todos los frenos y piezas de metal al actuar rápidamente. Al combinar un sistema de disolvente de limpieza eficiente con un sistema de rociado de alta producción, se asegura que sus trabajos se hagan rápidamente. El contenido ultrabajo de compuestos orgánicos volátiles asegura el cumplimiento con las normas medioambientales de los 50 estados.

**USOS TÍPICOS**

- Use en cilindros de frenos ABS, de disco, de tambor, tambores de frenos, forros de frenos, zapatas de frenos, horquillas, discos de embrague, pastillas de frenos de discos y discos.
- Es seguro de usar en todos los sistemas de freno incluidos resortes y frenos de culas.
- También se puede usar como limpiador de piezas de metal y herramientas.

Consulte la Hoja de Datos de Productos para las instrucciones de aplicación completas.

**CONTAINS (CAS#):** Acetone (67-64-1), Toluene (108-98-3), Carbon Dioxide (124-38-9), Methanol (67-56-1)

ORDER No. S00707000



0 75577 00283 2

Before using, carefully read CAUTIONS on back panel  
Antes de usarlo, lea cuidadosamente las PRECAUCIONES en la parte posterior de la etiqueta.

16.5 OZ (1LB 0.5OZ) • 467g

COPY FREE AREA

Scan, visit, or call for technical information.  
Escanee, visite o llame para obtener información técnica.  
© 2015 Sprayon Products  
Cleveland, OH 44115  
Made in USA with Global Materials  
Hecho en USA con Materiales Globales

**CL&D** MOBILE SOURCE  
Sprayon.com  
800-SPRAYON  
(800-774-9668)

**CL&D** Graphics Inc.  
1101 W. 2nd St.  
Goshen, WI 53066  
Ph. (262) 569-4868  
Fax. (262) 569-4875  
www.cidgraphics.com

**CL&D**

Note: It is ok to bleed backgrounds to the glue flap. There will not be any issues with adhesive not sticking because of ink.

5" GLUE FLAP • .125 COPY FREE AREA • .625 COPY FREE AREA

LMS00707000A

<p>Item#: 1011570</p> <p>C P N: LMS00707000A</p> <p>Customer: Sherwin Williams</p> <p>Plate #: 64221F</p> <p>Cust Item: 64221 MET Sprayon X SP707</p> <p>Master Est #: M00003708</p> <p>Document Size: 8.625 x 7.449</p>		<p><b>PLEASE NOTE:</b> Please read and check closely all information on the proof: color, color breaks, spelling, missing text. This information is extremely important. The job will not be sent to print until final OK is received. All information contained in the label and info box are the responsibility of the final approver.</p>	<p style="text-align: center; font-weight: bold;">PRINTING FLEXOGRAPHIC</p> <p><b>CUSTOMER SIGN OFF:</b></p> <p><input type="checkbox"/> APPROVED</p> <p><input type="checkbox"/> NOT APPROVED</p> <p><b>INITIAL &amp; DATE:</b></p> <p><b>ARTIST INITIAL &amp; DATE:</b></p> <p><b>QC INITIAL &amp; DATE:</b></p>
<p><b>JOB HISTORY</b> (Note: Revisions will be listed here as they occur.)</p> <p>4.29.15 (ds) Art Setup "F".</p>			

CL&D TECHNICAL SPECIFICATIONS • ROLLED FILM LEGEND			
<p style="text-align: center; font-weight: bold;">ROLLED FILM TEMPLATE</p> <p>CUSTOMER: Sherwin Williams SIZE: 8.625 x 7.449 ME: 3708:</p> <p>PSS Completed: (date/initials) Revisions: 10.24.13 DJK update to new legend</p>	<p style="text-align: center; font-weight: bold;">CONSTRUCTION</p> <ul style="list-style-type: none"> <li> Seal/Seam Area</li> <li> Dieline</li> <li> Fold Line</li> <li> Perforation</li> <li> Zipper</li> </ul>	<p style="text-align: center; font-weight: bold;">GRAPHIC PLACEMENT</p> <ul style="list-style-type: none"> <li> Print Area</li> <li> Printed Area NO COPY, LIMITED GRAPHICS</li> <li> Non Printed Area NO INK OR COATING</li> <li> Graphics Bleed</li> </ul>	<p style="text-align: center; font-weight: bold;">3D / DISTORTION</p> <ul style="list-style-type: none"> <li> NO Distortion Area</li> <li> HIGH Distortion Area</li> </ul>
<p style="text-align: center; font-weight: bold;">DISCLAIMER/TOLERANCE SPECIFICATIONS:</p> <p>1.) Glue flap area will be covered by opposing side of label during application 2.) Final outside packaging dimension may vary +/- .0625" 3.) Eyemark position subject to change pending label application equipment *Colors of the mechanicals within the template may be modified for legibility purposes. Assignment of purpose to these mechanicals has not been altered.</p>			


preserve. protect. prevent.



## NON-CHLORINATED BRAKE & METAL PARTS CLEANER


**SP 707**



<p>Item#: 1011570</p> <p>C P N: LMS00707000A</p> <p>Customer: Sherwin Williams</p> <p>Plate #: 64221F</p> <p>Cust Item: 64221 MET Sprayon X SP707</p> <p>Master Est #: M000003708</p> <p>Document Size: 8.625 x 7.449</p>	 <p>White</p>	<p><b>PLEASE NOTE:</b> Please read and check closely all information on the proof: color, color breaks, spelling, missing text. This information is extremely important. The job will not be sent to print until final OK is received. All information contained in the label and info box are the responsibility of the final approver.</p>	<p><b>PRINTING FLEXOGRAPHIC</b></p> <p><b>CUSTOMER SIGN OFF:</b></p> <p><input type="checkbox"/> APPROVED</p> <p><input type="checkbox"/> NOT APPROVED</p> <p><b>INITIAL &amp; DATE:</b></p> <hr/> <p><b>ARTIST INITIAL &amp; DATE:</b></p> <hr/> <p><b>QC INITIAL &amp; DATE:</b></p> <hr/>
<p><b>JOB HISTORY</b> (Note: Revisions will be listed here as they occur.)</p> <p>4.29.15 (ds) Art Setup "F".</p>			

### CL&D TECHNICAL SPECIFICATIONS • ROLLFED FILM LEGEND

<p><b>ROLLFED FILM TEMPLATE</b>          CUSTOMER: Sherwin Williams          SIZE: 8.625 x 7.449          ME: 3708:</p> <p>PSS Completed: (date/initials)          Revisions: 10.24.13 DJK update to new legend</p>			
<p><b>DISCLAIMER/TOLERANCE SPECIFICATIONS:</b></p> <p>1.) Glue flap area will be covered by opposing side of label during application          2.) Final outside packaging dimension may vary +/- &lt; .0625"          3.) Eyemark position subject to change pending label application equipment</p> <p>*Colors of the mechanicals within the template may be modified for legibility purposes. Assignment of purpose to these mechanicals has not been altered.</p>			

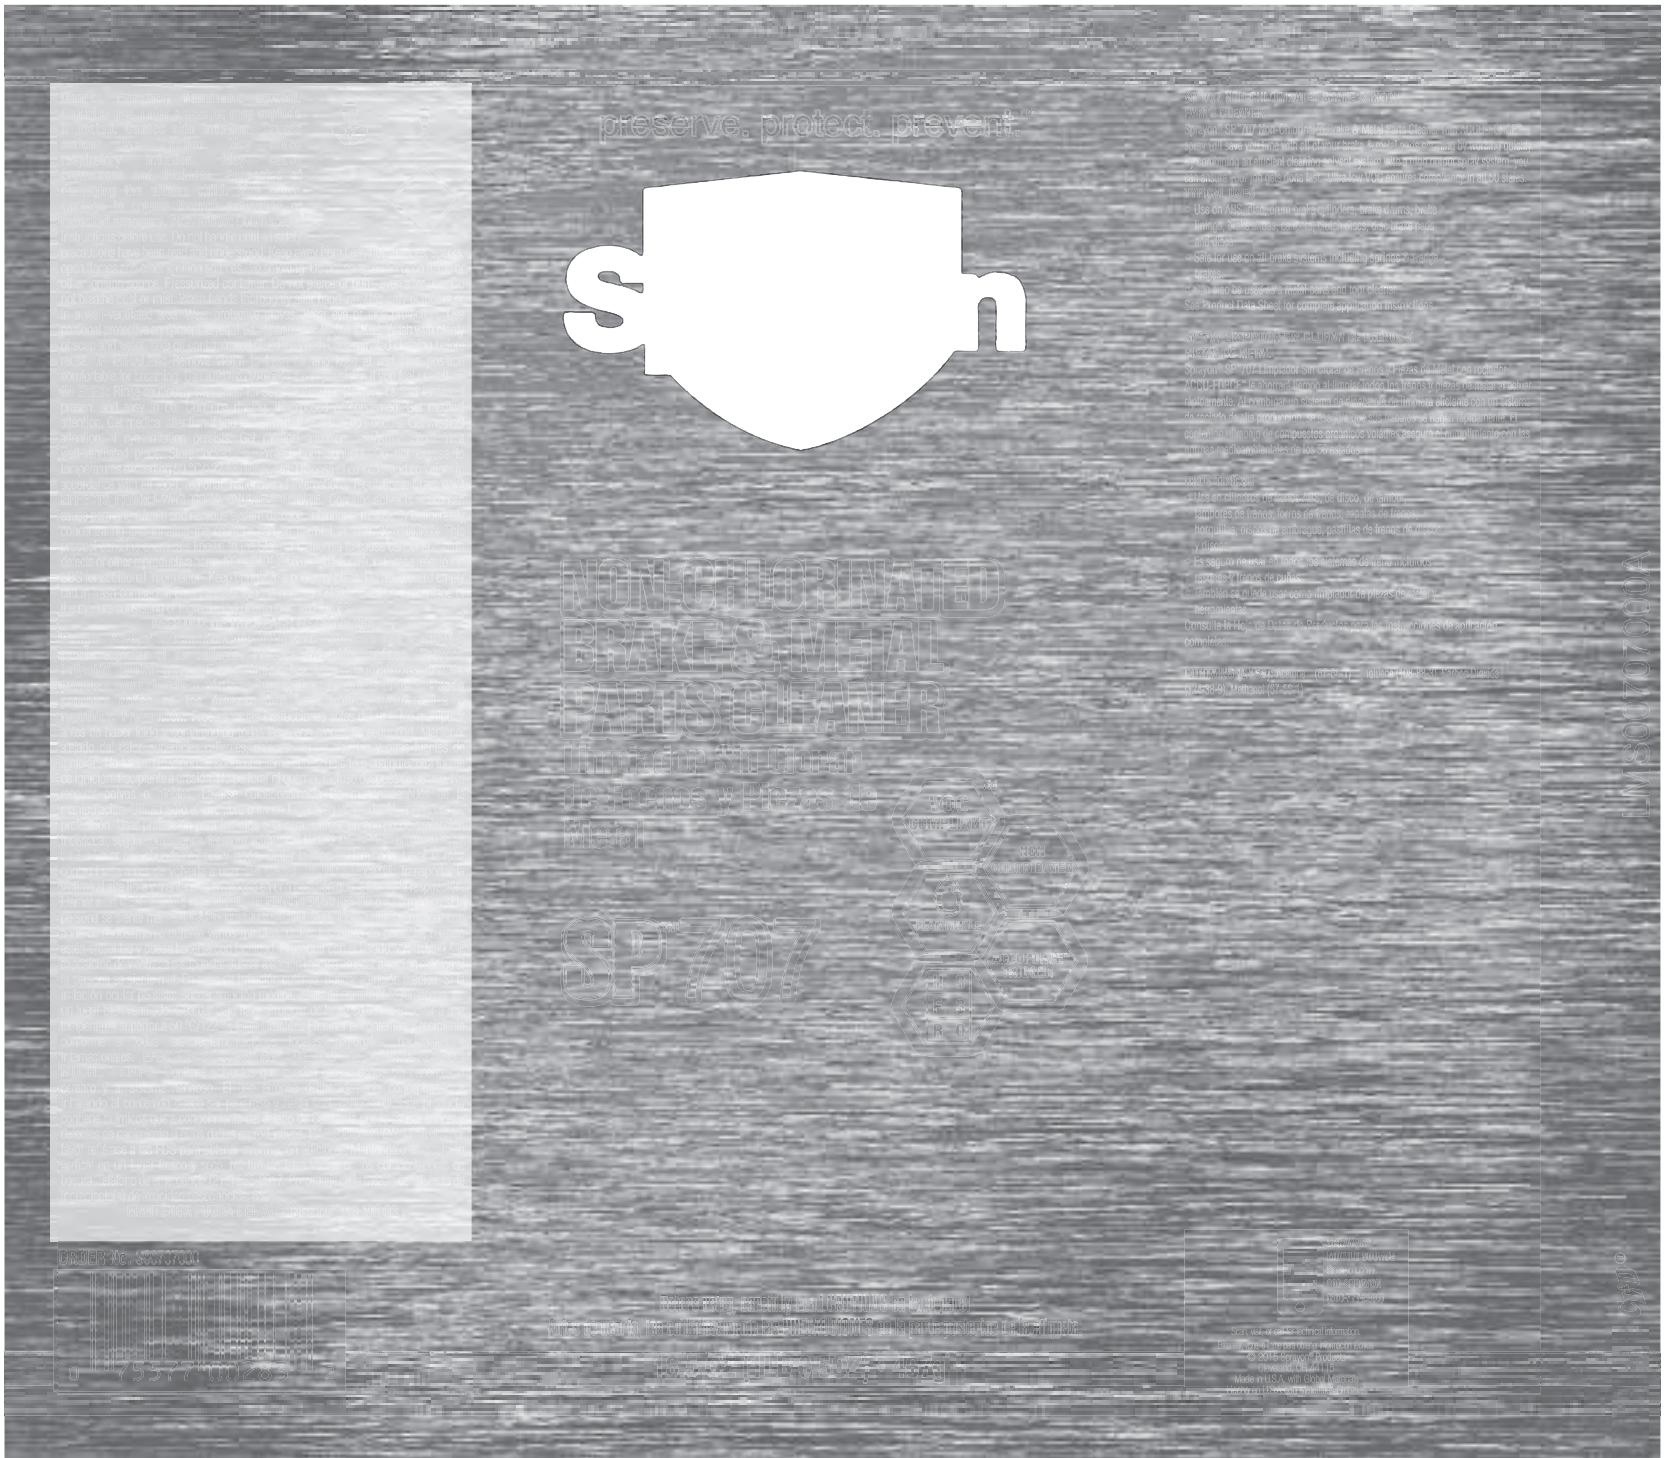

<p>Item#: 1011570</p> <p>C P N: LMS00707000A</p> <p>Customer: Sherwin Williams</p> <p>Plate #: 64221F</p> <p>Cust Item: 64221 MET Sprayon X SP707</p> <p>Master Est #: M000003708</p> <p>Document Size: 8.625 x 7.449</p>		<p><b>PLEASE NOTE:</b> Please read and check closely all information on the proof: color, color breaks, spelling, missing text. This information is extremely important. The job will not be sent to print until final OK is received. All information contained in the label and info box are the responsibility of the final approver.</p>	<p style="text-align: center;"><b>PRINTING FLEXOGRAPHIC</b></p> <p><b>CUSTOMER SIGN OFF:</b></p> <p><input type="checkbox"/> APPROVED</p> <p><input type="checkbox"/> NOT APPROVED</p> <p><b>INITIAL &amp; DATE:</b></p> <hr/> <p><b>ARTIST INITIAL &amp; DATE:</b></p> <hr/> <p><b>QC INITIAL &amp; DATE:</b></p> <hr/>
<p style="text-align: center;"><b>JOB HISTORY</b> (Note: Revisions will be listed here as they occur.)</p> <p>4.29.15 (ds) Art Setup "F".</p>			

<b>CL&amp;D TECHNICAL SPECIFICATIONS • ROLLFED FILM LEGEND</b>			
<p style="text-align: center;"><b>ROLLFED FILM TEMPLATE</b></p> <p>CUSTOMER: Sherwin Williams            SIZE: 8.625 x 7.449            ME: 3708:</p> <p>PSS Completed: (date/initials)            Revisions: 10.24.13 DJK update to new legend</p>			
<p><b>DISCLAIMER/TOLERANCE SPECIFICATIONS:</b></p> <p>1.) Glue flap area will be covered by opposing side of label during application            2.) Final outside packaging dimension may vary +/- &lt; .0625"            3.) Eyemark position subject to change pending label application equipment            *Colors of the mechanicals within the template may be modified for legibility purposes. Assignment of purpose to these mechanicals has not been altered.</p>			