
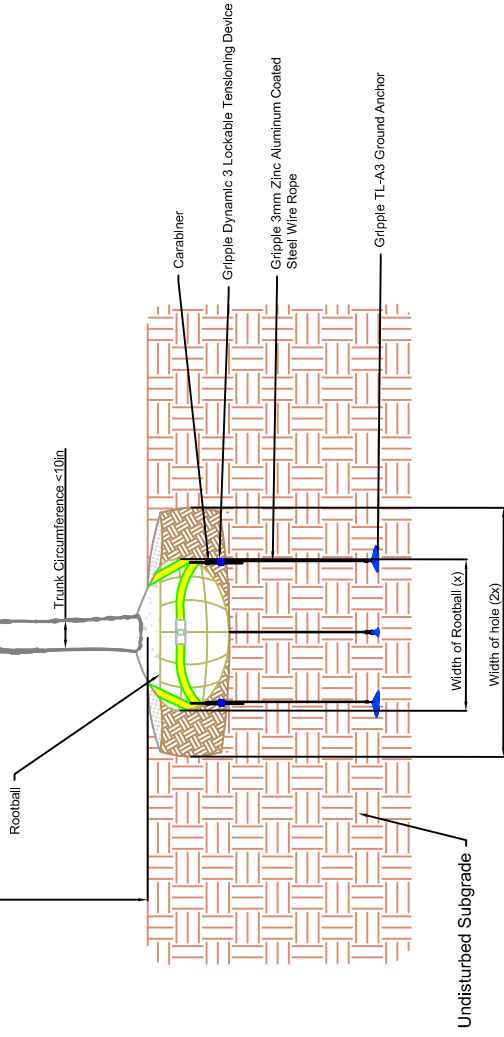


1 2 3 4 5 6

A C D E

Revision: A  
 Revision Date: Drawn By: MWJ  
 Details:

# Premium Root Ball Kit 3

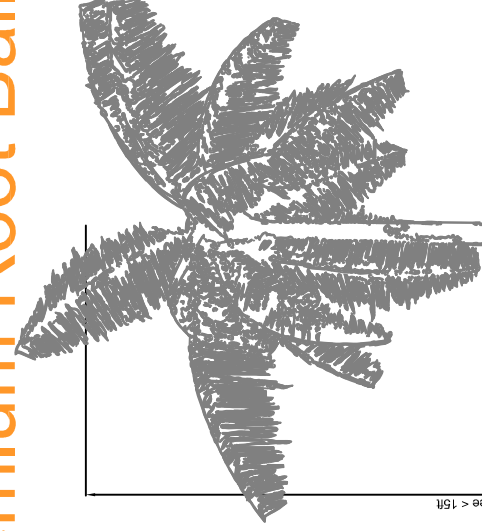

Premium Root Ball Kit 3 Component Specifications

Component	Quantity	Material Composition	Dimensions	Working Load
Grippple TL-A3 Ground Anchor	3	Die Cast Zinc-Aluminum Alloy ZA-2 (ASTM B-240-10)	Width: 1.82in Length: 5.00in Surface Area: 6in <sup>2</sup>	Up to 2500lbs*
Grippple Dynamic 3 Lockable Tensioning Device	3	Housing- Die Cast Zinc-Aluminum Alloy ZA-2 (ASTM B-240-10)	Height: 1.3in Length: 1.2in Width: 0.44in	880lbs
Grippple Wire Rope c/w Carabiner	3	Zinc-Aluminum Zn-Al Coated Steel (ASTM A-1023)	Ø: 3mm (1/8") Length: 5ft 1 x 19 Wire Strand Construction	1800lbs
Grippple Ratchet and Strap	1	Polyester Webbing with Yellow Passivated Steel Ratchet	Length: 10ft Width: 1.6in Thickness: 0.12in (Webbing)	4000lbs

\*Load can vary depending on substrate




Notes:

Always consult with Grippple Outdoor Solutions team prior to install.

Part No: N/A

Drawing No:

Scale: NTS



Drawn By: MJ

Date: 1/1/2019

Drawing Title:

Premium Rootball Kit 3 Detail

Grippple Inc.  
 1611 Emily Ln.  
 Aurora, IL 60502  
 866-474-7753  
 grippleinc@grippple.com

1 2 3 4 5 6

A

B

C

D

E