

A B C D E

# Tree Guying Kit 4

1


2

3

4

5

6

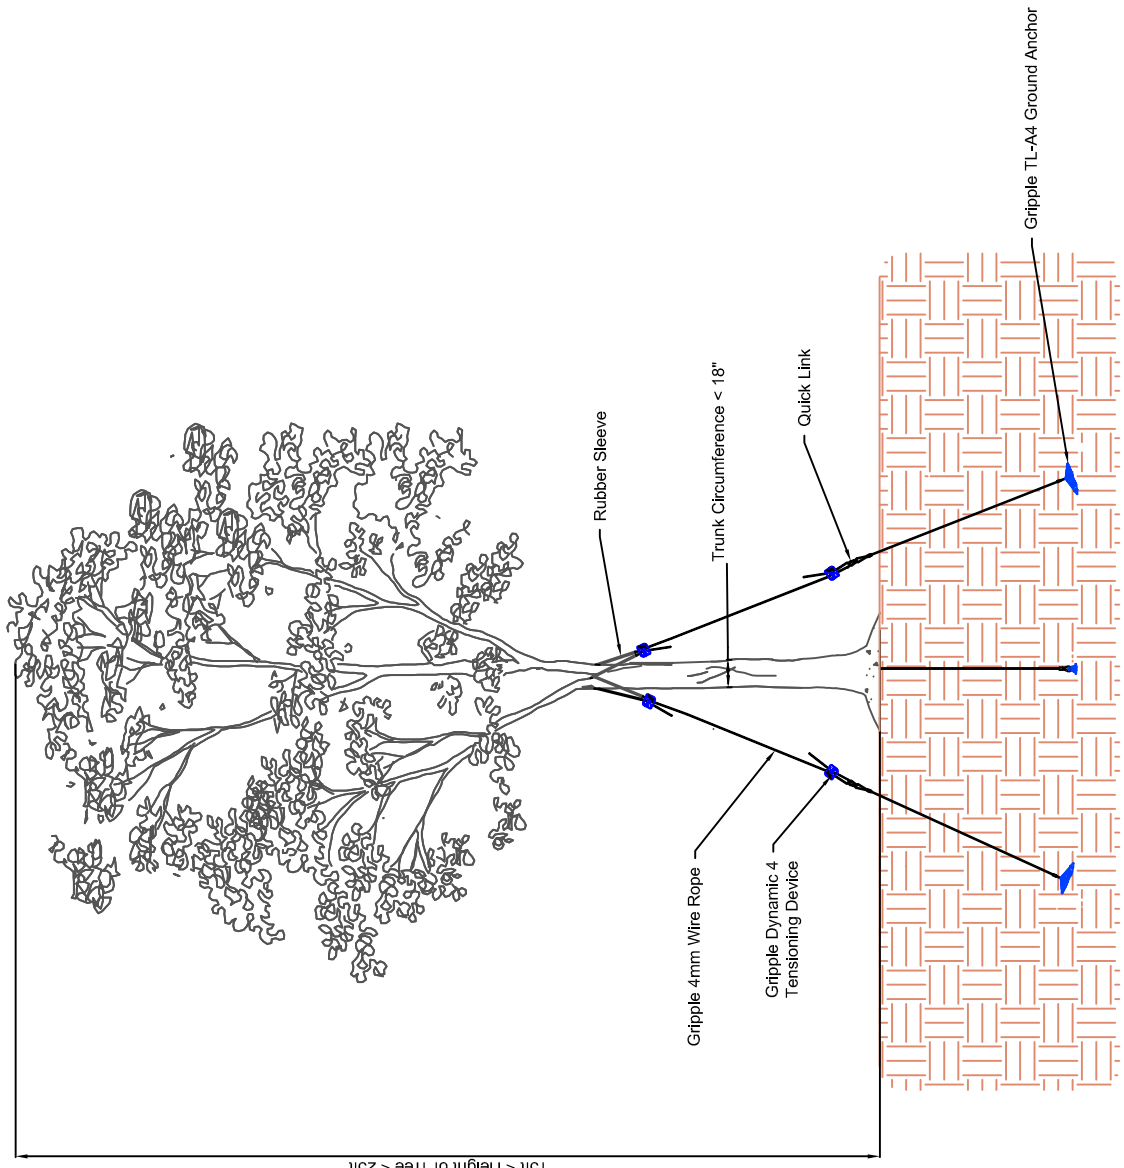

Tree Guying Kit 4 Component Specification

Component	Quantity	Material Composition	Dimensions	Working Load
Grippple TL-A4 Ground Anchor	3	Die Cast Zinc-Aluminum Alloy ZA-2 (ASTM B-240-10)	Width: 2.36in Length: 6.50in Surface Area: .12in <sup>2</sup>	Up to 8000lbs*
Grippple Dynamic 4 Lockable Two Way Tensioning Device	6	Housing- Die Cast Zinc-Aluminum Alloy ZA-2 (ASTM B-240-10)	Height: 1.92in Length: 1.65in Width: 0.59in	1320lbs
Grippple Wire Rope c/w Quick Link	3	Zinc Aluminum ZnAl coated Steel (ASTM A-1023)	Ø: 4mm (5/32") Length: 4ft 1 x 19 Wire Strand Construction	3300lbs
Grippple Wire Rope	3	Zinc Aluminum ZnAl coated Steel (ASTM A-1023)	Ø: 4mm (5/32") Length: 16ft 1 x 19 Wire Strand Construction	3300lbs

\*Load can vary depending on substrate



Notes:

Always consult with Grippple Inc. Outdoor Solutions Team prior to install.

Drawing Title:

Tree Guying Kit 4 Detail

Grippple Inc.  
1611 Emily Ln  
Aurora, IL 60502  
866-474-7753  
gripppleinc@grippple.com

Part No: N/A  
Drawing No:

Scale: NTS

Drawn By: MJ  
Date: 1/1/2019

A B C D E