

1. Place rubber strap around tree trunk close to the first set of branches. Thread end through loop and pull tight.

1. Coloque la banda de goma alrededor del tronco del árbol cerca del primer grupo de ramas. Ensarte el extremo a través del lazo y tire con firmeza.




2. Hammer each stake into the ground at a 45-degree angle pointing away from tree. Space the three stakes evenly around tree, outside the root ball or at the drip line.

2. Inserte cada estaca en la tierra a un ángulo de 45 grados alejada del árbol. Coloque las tres estacas uniformemente alrededor del árbol, por fuera de la bolsa contentiva de la raíz o en el canal de goteo.



3. Thread rubber support through end of hook, adjusting to achieve desired length and tension.




4. Thread rubber strap through other loop, leaving a tail to be wrapped back through.

4. Introduzca la banda de goma a través del otro lazo, dejando un extremo para enrollar hacia atrás.



5. Push tail through the loop. Pull tight to secure. Excess may be cut off, but save enough (4-8 inches) for future adjustment.

5. Saque el extremo a través del lazo. Hale firmemente para asegurarlo. El sobrante puede cortarse pero deje de 4 a 8 pulgadas (10,2 - 20,3 cm) para ajustes futuros.

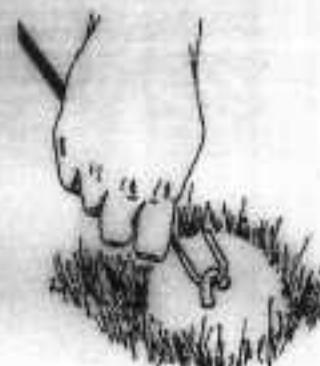

6. Hook each rubber strap to a stake. Unhook before mowing to eliminate trimming.