3 in 1 SWAP-TOP* Mister



Down Spray Ideal for Roses or small an (Covers 13-16 sq. ft.)





Center Strip Ideal for Narrow walkways & planters. (Covers 7 sq. ft.)



Quarter Circle lideal for Come (Covers 16 sq. ft.)

HOW TO INTERCHANGE YOUR SWAP-TOPS:





3.) Slide back on the open slot side of Swap-Top® until you feel a slight snap and stop on the "G" shaped Mister.

3 in 1 SWAP-TOP® Mister







MLM-404

180° Half Circle Fan Ideal for areas that need a 180" half circle spray. (Covers 25 sq. ft.)

End Strip Mister

Provides a 4 narrow pattern in one direction.



Effectively waters the ends of walkways or planters. (Covers 4 sq. ft.)

Full Circle Fan

Fine Mist ideal

for small areas

(Covers 25 sq. ft.)

Center Strip Mister

Provides a 4.5' narrow

pattern in



opposite directions. Ideal for central areas of walkways and planters. (Covers 7 sq. ft.)

Quarter-Circle Mister

pattern.

(MLM-03) Provides full



Recommended for corners of landscape or gardens. (Covers 16 sq. ft.)

Half-Circle Mister




circle pattern. For back of landscaped area to mist away from house or sidewalk.

(Covers 23 sq. ft.)

Down Spray Mister Full Circle Mister

(MLM-05) Spinner provides a 6'-8' full circle



New 15' Full Circle Spinner MLM-15 (Covers 135-155 sq. ft.)



pattern. Specifically designed for small garden areas to keep water off rose foliage and to water root zone only. (Covers 13-16 sq. ft.)

Follow These Ten Easy Steps and You'll Be Up and Misting in a Snap!

(Also use these steps for installing the Starter Kit MLK-81)

Step 1

Attach the Back Flow Prevention Valve (MLF-31) to your outdoor faucet (if one is not already attached). If your household water pressure exceeds 50 psi, use our Pressure Regulator (MLA-58).



Step 2

Attach the Hose Fitting (MLF-33) by threading it onto the bottom of the Back Flow Prevention Valve. Tighten firmly.

Attach the 1/2" Poly Tubing (MLT-72) or (MLT-71) to the Hose Fitting. Part B: Simply push the locking collar on the Hose Fitting up. Then push the 1/2" Poly Tubing onto the Hose Fitting as far as it will go. While holding the tubing, thread the locking collar of the Hose Fitting "Counter-

ckwise" down over the tubing and tighten firmly.

Step 3

Lay the 1/2" Poly Tubing along the desired path through your garden or landscape. If you plan to run tubing in opposite directions, attach the

Tee-Fitting (MLF-34) and follow Part B of Step Two for installation.

*Use Scissors or Cutting Tool (MLT-CUT) To Cut Tubing



*Turn on faucet until water flows gently out of the end of the 1/2" Poly Tubing to flush out any debris in the line Before and During the installation of the Stake Assemblies (MLS-211).


Step 5

First decide where to place the Misting Stake Assembly. Then punch ple in the side of the 1/2" Poly Abing using the Punch Tool (MLA-51). Included with the MLA-51 are Goof Plugs used to plug any holes you may have punched incorrectly.



The Alternative to Handwatering®



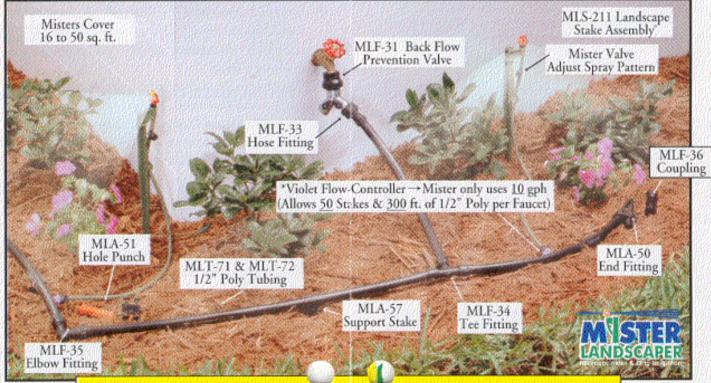


ABOVE GROUND IRRIGATION...SIMPLY COVER WITH MULCH!

"Agriculture Irrigation Used By Commercial Growers Worldwide."


Step 6


Now to install the Misting Stake Assembly, simply snap in the Violet/Black Barbed Adapter into the punched hole of the 1/2" Poly Tubing. Next, push the Stake into the ground. Use a hammer if the ground is hard.



Step 7

Once all Stake Assemblies are installed, slide the End Fitting (MLA-50) about 6" onto the end of the 1/2" Poly Tubing. Fold tubing over once and slide it back through the open hole of the fitting to crimp the end.







Step 8

Go back and check your new Misting system. Check each Mister to confirm correct spray direction. Direction is easily adjusted by turning Mister left or right. Also check fittings for leaks, and if a leak is found, repeat steps for installing that fitting.

Step 9

Turn off water, then you may leave above ground or simply cover 1/2" Poly Tubing with dirt or mulch, if desired. It may also rest above the ground by using the Support Stakes (MLA-57) to hold the tubing down.

Step 10

The Coupling (MLF-36) also enclosed in your Kit makes it easy to add another Kit or more 1/2" Poly Tubing. You may also use the oupling to repair tubing if it is unctured or cut.

Approximately 20 Min. Project



Mister Landscaper is the Preferred Low-Volume Irrination of

· Mister Landscaper, Inc. · P.O. Box 1849, Dundee, FL 33838 ·

E-mail: sales@misterlandscaper.com · Website: www.misterlandscaper.com · Ph: (863) 439-3200

Special Features of Our Stake Assemblies =

With the *Violet Flow-Controller, Misters only use 10 gph from varying household water Pressures! (Which allows 50 Stake assemblies & 300ft. of 1/2" Poly tubing per Faucet's with only 40 psi water pressure) Each Stake also comes with 27" of our Flexible Connector Vinyl, a Locking Collar, and a Mister Adjustment Valve to adjust the spray pattern or shut off the





water flow. If your household water pressure exceeds 50-60 psi, use our 50 psi Pressure Regulator (MLA-58).

* Suggestion: Place stake assemblies every 6 to 8 ft. apart.

Other Misting Products Available MLS-22

MLS-23











Mister Riser

8" Stake Extension to Add Height

Connector Vinyl with Adapters to Add Length

Watering Products for Hanging Baskets & Potted Plants:







Pressure Compensating 1gph Drippers with **Barbed Connectors** MLD-PC1

Adjustable Dripper Stakes with Barbed Connectors MLD-STA

Small Couplers, Elbow, and Tees for Connector Vinyl Tubing







Mister Landscaper Watering System

		A CONTRACTOR	CONTRACTOR OF THE PARTY OF THE	100000	11/20/20 19/20 11/2	0 00 TO 10 00 TO	
16 00 18		140 M 140 M	A DEMAND	(A) [A] (A)	W 63 62	22 85 51 5	212
12 30 30	19142 127		19 mg 19	12 13 11	1000		47
11-10000	100 000 150 9	7. (0)210	26 28 10 13	20,000,00	97 93 97	NO NO BEN	919
Mar 12	88 84 X X	72 88 708 Y	11,48,03,45	48 60 10	111,854,857	50 OF 60 P	44
124 G 6	17/64/62/8	20 (10)	34 (17) 18	经初集	23/11/2	12 18 CC	1 6
41 M St	\$1,70 FL S	13.30	行の保持	报情分	胸侧侧		10
数源器	常見紹為	18 EL EL	1. 監察 2	As dual	新器 別		40
72.50 计	数数额的	i Parity i Tari	名數數表	200	的器数	53 2% PA	44
WWW.	U-10103 (8	罗格图图	21 21 25 32	95 8h 92	以 的 次		Q AT
10 m d	50 00 50 m	60 W 100	A TOUR ON	100 20 31	展開的	25 477 150	10
2471.0	100 0 000 00	72 (2.12)	17770	好货价	24 7 33	第月197	
10000	1 6 30 25 0	U 35 15 8	2 KM 60 10	数物器	初新级	27 50 101	26
au obi	59 59 60 12	90 30 80 0		60 30 Sh	WI WAY	17 74 011	W C
*******	OF THE	10771		20 10 2	08 80	01 12 13	
20 20 5	100 TO 10	112 12 10 1	5 10 2 9	11 B 223 79	31 24 12	91 Un 729 I	
100 Val 10		930 910 976 B		100 Mile (12)		GT 415 GP (
	20 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	000 000 200		20 20 10	200		+
ISKA Z			WHEN TO BY	20 20 20	12025 23	ON 102 41W 2	01.10
11/4/3/12	100 30 55 55	180 190 U.S.	STEEL ST	00 00 00	24 0 14		
9 00 72 7.0	35 VEV. W	0384 013	94/2/0	Light M	11119 70	2, 27 (1)	14
<mark>-</mark> 171 2428	4 KI 20 M	87 O 21	2012/4/20	73 77 69	66 W 16	12 12 19 19 19 19 19 19 19 19 19 19 19 19 19	
184 19 20	學校可能	(f) (f) (a)	开路 松 俊	HE WEST	0.93		2 7
3 830000	规则统格	2012		MY	120 Call H	11 32 22 1	71.7
	累 强 所 亞	유용사	医阴阳线	图 机设	观别器	99,931	017
Jan John J.	邻居保护		3 /3 D Z	27 KY 18	27 /24 01	思力致。	# 5
100 W Y	開機器器	100%	的现在形式	IN MARIO	MICH STREET	数似的	
AND IN A	12 20 11 10	177 22 Hit 2	建筑斯	CHI CONTRACTOR	10 TO 10	HE ON SER	7
11 22 23	数据事業	別感燃料	N 140 700 70	30 M X	1272 10	H er og t	
10 m	70 fe 23 S	35 TR 188	1 37 2 3		2372	in you	
NA TO	D 10 813	27 (7) (1)	000 97 6	17 50 27	1781		
N. S. S.	B 0972 5	100 (0.10)		2490.00	307 (37) 37	n ava	7
	20 (0) (0) 7	120 12 22 2		mr 701 915	20 68 13	R W W	
-		20 20 100		ell ell file	95 000	100 81 820	रेवीर
		100 00 000		100 miles	97 - 37 781 187 (20 197)	00 00 00 00 00 00 00 00 00 00 00 00 00	
20 St. 35	12 17 17 17 17 17 17 17 17 17 17 17 17 17	1000	11 00 10 72	121212	124 (E) 750 721 715 (24)	50 98 98 0	2
WI 114 A	123 22 14 0	A PROPERTY	D 963 15005	02 10 00	68 60 12	ST 21 44 1	97
182 AM 22	322 HURZAM	76 (S. UK)	2 W m 18	10.18	M400 C	32,100,000	1
	相談 新鲜	12/03/03	9 III W 8	1215740	期間第	6/192/64	11
M (2) (1)	侧原 躁慢	10 (20)	21.81771.9	14 17 17	新知品	9.12.33	M.B
	100 /4 84 ft	11653723		140 0418	200 GT (S)	AV 377 (%)	31 1
10 Mai	420 74 12 1	133 (5.40)	i wibit	1,910 6	医肾髓膜	JI [488]	846
W 100 80	现状像形			200	烈器额	脱漏器	2/2
	觀問問題	138 (10.12)		器原及	深的影	可們應	00
12 JOHN	00 W 10 2	27 K K	3 3 2 2	78 B K	37 37 Hz	要では	Y
多数数	WBR I	0.000 027	20 60 70 83	20 97 11	177 (07) (02)	anio/4	il le
00.012	12 W 12 B	on service	72 EEE EEE FE	TW AS A	10.21.0	58.0	700
Wale.	A 38 A 18	ev 20 20 1	0.37 30 3		12 10 22	海梨 湖	i i
A COLUMN	17 A 18 A 20 A 19				10000	70 70 70	

List the 'Items you need to purchase for your Low-Volume Irrigation System.

Quantity	Item#	Quantity	Item#
		lge or <u>ologiano</u> (1)	
	<u>2270,592634</u> 03324 (130,532560 220,53		
19170 01(42) 1.68 1927 1911 (5)	<u> 2554U (4160) 2269</u> 2002 (1800) 2769		
) <u>V</u>		(201 <u>12000)</u> (1) (1) (1) (1) (1)	
and revenue. Vanamua subbi	11451 (1283 52 140) 1150 2008 (1283 127 147 147 147 147 147 147 147 147 147 14		

*(Item descriptions on reverse side.)

Mister Landscaper Starter Kit

Everything you need to water 50 Linear feet, all in one inexpensive kit. Includes: 50 ft, 1/2" Poly Tubing, 5 Pre-assembled Stake Assemblies, and all accessories to attach to your water fancet to have a complete system.



Misters

Misters are illustrated on the reverse side.

Misting Landscape Stake Assemblies"

Three pre-assembled stake assemblies with half circle Mister, locking collar, 27" flexible vinyl, Mister Adjustment valve, and pre-set 10 G.P.H. Flow-Controller to snap into 1/2" Poly Tubing-

3 per card

Landscape Stake Assembly™

Pre-assembled stake assembly comes with 27" flexible vinyl, locking collar, Mister Adjustment valve, and preset 10 G.P.H. flow-controller to snap into 1/2" Poly Tubing. Thread in the Mister of your choice.

Place every 6 to 8 ft. apart.

MLS-211

MLS-21

Violet Flow-Controller (10gph) for Stake Assemblies

Regulates Misters to use only 10 gallons of water per hour(gph). With these devices you can install up to 50 Stake Assemblies per 300 ft. of 1/2" Poly Tubing.



MLS-VFC

4 per card

8" Stake Assembly Extensions

Adds up to 8 inches of height to the Stake Assembly so that Misters can mist over top of plant or tall foliage.



3 per card

Flow-Controlled Adjustable Mister Risers Two pre-assembled Mister Risers with half circle Mister, Mister Adjustment valve, and pre-set 10 G.P.H. Flow Controller to thread into 1/2" poly.

Place every 6 to 8 ft. apart.

2 per card

Flow-Controlled Adjustable Mister Riser

Pre-assembled Mister Riser, Mister Adjustment valve, and pre-set 10 G.P.H. Flow Controller to thread into 1/2" poly. Thread in Mister of your choice.

Mister not includes

Place every 6 to 8 ft. apart.

1 per card

20' Green Connector Vinyl Tubing with 10 Connector MLT-S20 Barb Adapters

Use this Green Connector Vinyl and Barb Adapters to extend the Stake Assembly

further away from the 1/2" Poly Tubing.



MLT-71 1/2" Poly Tubing, (.600x.700) 50' Foot Roll Connects to your water faucet using the Hose Fitting MLF-33. Runs water supply to Misting Stake Assemblies, Mister Risers, and Drippers.

Support Stakes for 1/2" Poly Tubing

1/2" Poly Tubing, 100 Foot Roll

These Support Stakes hold 1/2" Poly Tubing down close to the ground.

3 per card

MLT-72



1/2" Poly Tube Fittings and Accessories

Back Flow Prevention Valve

This 3/4" hose thread Valve prevents water from flowing back into faucet when water pressure is shut off.

(Not ASSE approved)

I per card

MLF-31

MLF-33

Hose Fitting with locking-collar

3/4" Hose Thread Fitting connects 1/2" Poly Tubing to either the Back Flow Prevention Valve or any 3/4" Hose Thread Attachment.

king-collar fittings are reusable)

Tee Fitting with locking-collars Lets you run 1/2" Poly Tubing in three directions.

(Locking-collar fittings are reseable)

1 per card



Elbow Fitting with locking-collars Lets you run 1/2" Poly Tubing around or in tight corners.

(Locking-collar fittings are resuable) 1 per card MLF-35

Coupling with locking-collars

Use to connect two ends of the 1/2" Poly or use to repair a cut in the 1/2" Poly Tubing.

2 per card



(Locking-collar fittings are reusable)

End Fittings Securely crimps 1/2" Poly Tubing at the end of the line. Simply uncrimp to winterize or to add on more tubing.

3 per card



de Punch With "Goof" Plugs

Punches holes in 1/2" Poly Tubing which allows you to snap in Stake Assemblies. "Goof Plugs" correct mistakes when punching holes in poly tubing.

1 Tool / 4 Goof Plugs Per Card



Filter-Fertilizer Combo Kit - Fertilizes your plants & Filters dirty water for Drip & Mist systems (150 mesh screen). This kit attaches directly to the faucet and connects to 1/2" Poly. The back-flow prevention valve must be used in front of this Filter-Fertilizer. General Purpose Water soluble fertilizer tablets MLFF-44

& MLFF-4K

etics (plany 1976) (1972) as in a single fra 1970 as the first of the

Drip Products for Hanging & Potted Plants

Adjustable Dripper Stakes with barbed Connectors
Use these Dripper Stakes to slowly water your potted
plants and hanging baskets. These Dripper Stakes can
be adjusted to flow between 0 and 10 gallons of water
per hour (gph).

3 per card

MLD-STA

Pressure Compensating 1 gph Drippers with barbed Connectors

Use these Drippers to slowly water your hanging baskets and potted plants.

*For attachment, see MLT-B30 below.

MLD-PC1 ඓඓල්

elja elja elja elja 4 each per card

Small Couplers, Elbows, and Tees for Connector Vinyl Tubing

Use these to attach the Drippers and Adjustable Dripper Stakes from the Connector Vinyl Tubing (MLT-B30) to the 1/2" Poly Tubing. MLT-ATE

TO TO TO TO

CO TO TO

A CO TO

CO TO

A CO

30 ft. - Black Connector Vinyl Tubing
Use this flexible and Professional Quality Vinyl Tubing
to extend from the 1/2" Poly Tube to Drippers, Dripper
Stakes, and Stake Assemblies.

MLT-B30



1 per card

P.V.C. Retrofit Products Converting High Volume To Low-Volume Irrigation

1/2" PVC Riser adapter with 6-Outlets, each individually adjustable.

Converts a single sprinkler to 6 Stake Assemblies or Drippers.





MLA-P2P

MLA-56

1/2" PVC x 1/2" Poly Locking-Collar Fitting
Use this 1/2" male pipe thread fitting to
connect 1/2" Poly Tubing to a 1/2" female

connect 1/2" Poly Tubing to a 1/2" female pipe thread fitting. PVC 1/2 Poly Tubing

I per card

PVC to 3/4" Male Hose Thread Fitting

Use PVC solvent to weld this fitting over 1/2" PVC pipe or inside a 3/4"

PVC fiting. To connect this fitting to 1/2" Poly Tubing, use the hose fitting (MLF-33).

PVC 1/2" Poly Tobing

UESTIONS & ANSWERS about



Q. Is Mister Landscaper easy to install?

A. Absolutely! It was designed for homeowners like you and hooks up to an ordinary outdoor faucet. The starter kit takes only 15-20 minutes to install!

Q. Where can I use it?

A. Mister Landscaper is ideal for landscaped areas, shrubbery, rose and other flower beds, trees and gardens of all kinds.

Q. How long a line can I run from one faucet?

A. With a household water pressure of 40psi* or more, you can run a line of 1/2" Poly Tubing up to 300ft. with a Misting Stake Assembly every 6 feet. (50 Stake Assemblies) *To learn your water pressure, call your water company.

Q. How much water does it save? 🏩

- A. Up to 90% compared to high-volume systems. Each stake assembly uses only 10 gallons of water per hour (gph).
- Q. How much area does each Mister cover and will it spray my house and sidewalk?
- A. About a 4'-6' radius. A variety of Misters with different spray patterns are available from Mister Landscaper so you can choose the right Misters for the right areas. There are Misters which spray half-circles, quarter-circles, full-circles, etc. so you can customize your landscape, or use the Mister Valve on the Misting Stake Assembly to adjust the pattern.
- Q. When should I water and how long should I water?
- A. Early morning "Misting" is most effective for watering landscape and gardens allowing water to absorb into soil.

 Depending on the type of soil, climate conditions, and variety of plants, we recommend that you "mist" every other day for 15-30 minutes. This may vary!


Q. How do I fix a Mister that won't Spray?

- A. During Installation the Mister and Violet Flow-Controller may have become clogged with debris. Use either a small paper clip or needle to unclog the debris from the orifice. If your water supply has hard or dirty water, use a screen filter like the Mister Landscaper Filter (MLFF-41).
- Q. What tools do I need?
- A. Scissors may be needed to cut the 1/2" Poly Tubing or connector vinyl, but that's all you need.
- Q. Can I run the tubing under a sidewalk or existing sod?
- A. Under the Sidewalks: To install the Poly Tubing under a sidewalk, simply use a garden hose with water on at full pressure to tunnel underneath.

Under Grass or Sod: For burying the Poly Tubing under existing sod, use a lawn edger to wedge the Poly Tubing underneath the sod.



- Q. What happens as my plants grow taller than my Misting Stake Assembly?
- A. Use the Stake Extensions (MLS-22) to add up to extra 8" to the height of the Stake to help Mist over the plants.



- A. Use the Flow-Controlled Adjustable Mister Riser instead and get all the same benefits except for the Stakes' flexibility of movement.
- Q. How do I move my Stake Assemblies further away from the 1/2" Poly Tubing?
- A. Use the Connector Vinyl tubing and barbed connectors to extend the Stake Assemblies from the 1/2" Poly Tubing.
- Q. How do I connect Mister Landscaper to an existing PVC system?
- A. Use the PVC to Hose Thread fitting (MLA-56) to attach to the Hose Fitting (MLF-33) with the 1/2" Poly Tubing.

OR

Use the 1/2" Flow-Controlled PVC Shrub Adapter (MLA-54). Thread it onto a 1/2" PVC Riser and use the Mister of your choice.

OR

Use the 1/2" PVC Riser Adapter (MLA-RA6) with 6-Outlets, (each is individually adjustable). Converts a single Sprinkler to 6 Stake Assemblies or Drippers.

OR

Use the 1/2" MPT x 1/2" Poly Locking Collar fitting (MLA-P2P). This 1/2" Male pipe thread fitting connects 1/2" Poly to a 1/2" female pipe thread fitting.

Mister Landscaper, Inc. A Division of Maxijet P.O. Box 1849 Dundee, FL 33838 (863) 439-3200 Email: sales@misterlandscaper.com

Website: www.misterlandscaper.com















