


A B C D E

Tree Guying Kit 3

Revision: A
 Drawn By: Details:

1 2 3 4 5 6

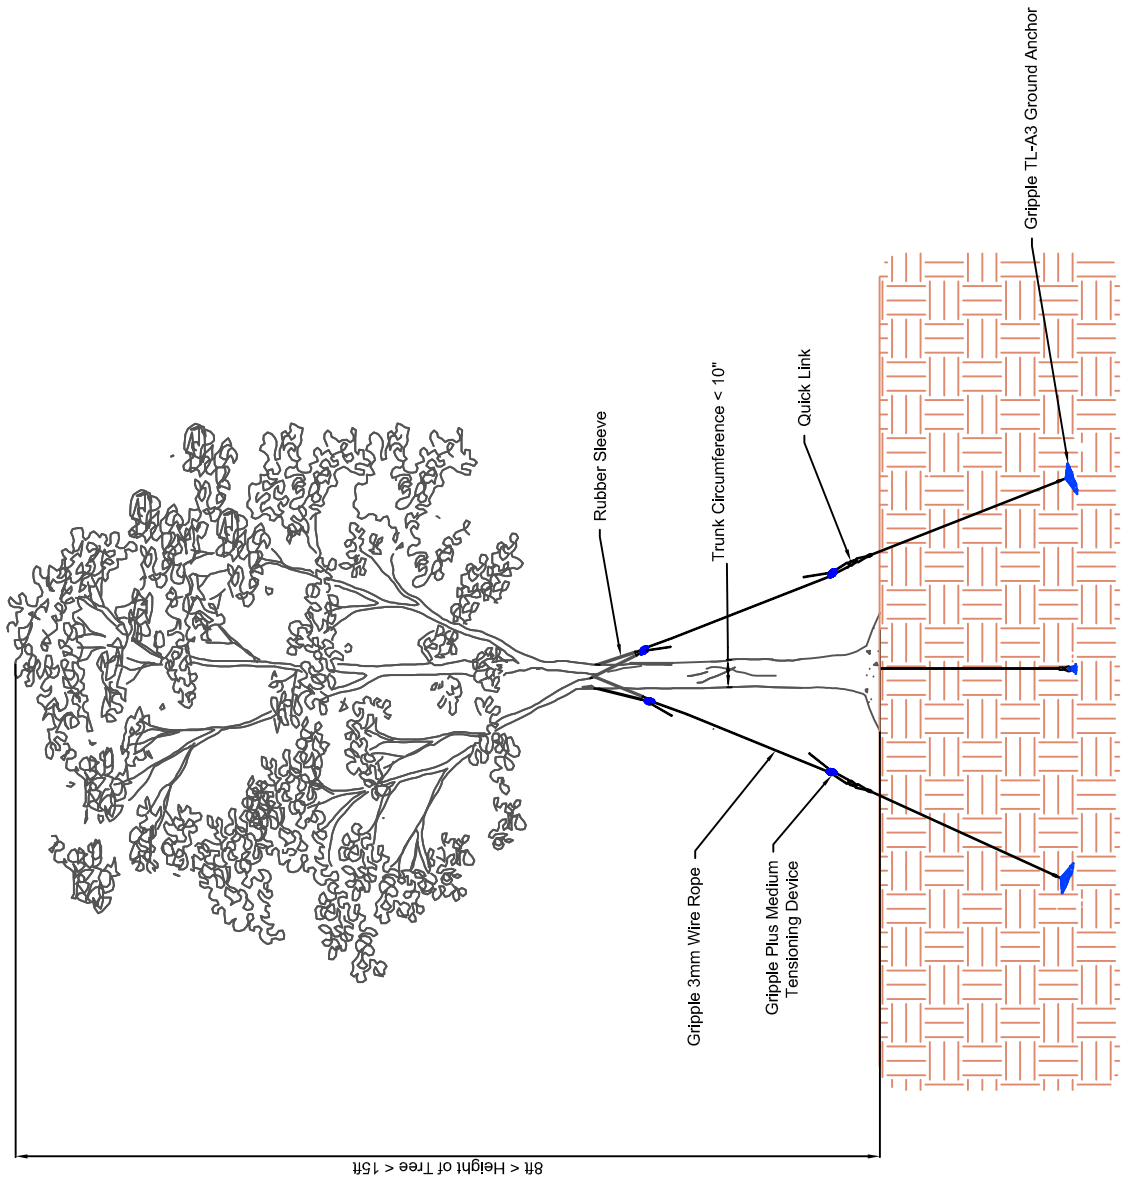

Tree Guying Kit 3 Component Specification

Component	Quantity	Material Composition	Dimensions	Working Load
Gripple TL-A3 Ground Anchor	3	Die Cast Zinc-Aluminum Alloy ZA-2 (ASTM B-240-10)	Width: 1.62in Length: 5.00in Surface Area: 6in ²	Up to 2500lbs*
Gripple Plus Medium Two Way Tensioning Device	6	Housing- Die Cast Zinc-Aluminum Alloy ZA-2 (ASTM B-240-10)	Height: 1.0in Length: 1.5in Width: 0.43in	880lbs
Gripple Wire Rope c/w Quick Link	3	Zinc Aluminum ZnAl coated Steel (ASTM A-1023)	Ø: 3mm (1/8") Length: 4ft 1 x 19 Wire Strand Construction	1800lbs
Gripple Wire Rope	3	Zinc Aluminum ZnAl coated Steel (ASTM A-1023)	Ø: 3mm (1/8") Length: 14ft 1 x 19 Wire Strand Construction	1800lbs

*Load can vary depending on substrate



Notes:
 Always consult with Gripple Inc. Outdoor Solutions Team prior to install.

Part No: N/A
 Drawing No:

Drawing Title:
 Tree Guying Kit 3 Detail

Scale: NTS

Drawn By: MJ
 Date: 1/1/2019

Gripple Inc.
 1611 Emily Ln
 Aurora, IL 60502
 866-474-7753
 grippleinc@gripple.com

A B C D E